


Product Information Sheet

UN492VS - Video Wall Large Format Display

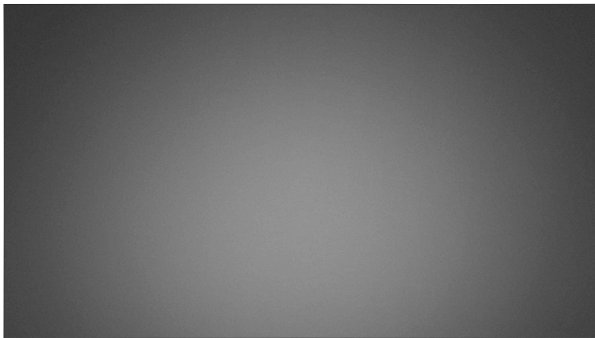

Bring your walls to life

The UN492VS, with its 49" display, ushers in an exciting era of video display wall technology, one that allows for even better image quality, even easier installation, and a longer-lasting consistency.

Expect compelling picture performance with the UN492VS's powerful calibration capabilities. Tune the picture quality to your specific needs and create one single image across multiple displays. The 500cd/m² display brightness provides dependable readability at a fair price. The combined bezel of only 1.8mm optimises active video space. Its integrated heat management ensures a reliable and long-lasting operation.

Video walls embody the "wow" factor. The large-sized modular displays attract shoppers in retail malls and other public spaces. They entertain museum goers and help make decisions easier for diners in quick-service restaurants.

Benefits

Enhanced imaging performance – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

Easy installation – effortlessly set up your wall display with Auto TileMatrix and out-of-the-box calibrations. Save time by plugging in ready-to-use image presets for predefined application scenarios.

Lifelike and consistent colour – expect colour reproduction that feels true to life with IPS panel technology, the top choice when it comes to colour consistency. The S-IPS panel ensures that perfect visibility is maintained in landscape and portrait mode and at extreme viewing angles as viewers pass by.

Secure Reliability and Longevity of Video Walls – unique NEC heat management system enables the user to monitor and control the heat inside the display.

Smart media integration – seamlessly integrate the media source of your choice into the video wall display. Use the wide range of NEC's OPS Slot-in PCs, and Raspberry Pi compute modules, for content feed and computing.

Cost Saving Device Management – save effort whilst managing all connected NEC devices from a centralised location by using the NaViSet Administrator 2 software tool.

Product information

Product Name	UN492VS
Product Group	LCD 49" Video Wall Display
Order Code	UN492VS

Display

Panel Technology	IPS with Direct LED backlights
Active Screen Area (W x H) [mm]	1,073.8 x 604
Screen Size [inch/cm]	49 / 123.2
Aspect Ratio	16:9
Pixel Pitch [mm]	0.559
Brightness [cd/m ²]	500
Contrast Ratio (typ.)	1100:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (28)
Supported Orientation	Landscape; Portrait

Synchronisation Rate

Horizontal Frequency [kHz]	26 - 134
Vertical Frequency [Hz]	23 - 86

Resolution

Native Resolution	1920 x 1080			
Supported on DisplayPort and HDMI	3840 x 2160; 1920 x 1080; 1600 x 1200;	1360 x 768; 1280 x 1024; 1280 x 768;	1080i; 1080p; 1024 x 768;	800 x 600; 720p (50/60 Hz); 640 x 480

Connectivity

Input Video Analogue	1 x VGA; Composite (RCA)
Input Video Digital	1 x DVI-D (with HDCP); 1 x OPS Slot; 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3.5mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x RS232; 2 x LAN 100Mbit; remote control wire (3.5mm jack)
Input Data	1 x microSD (MediaPlayer); 1 x USB 1.0 (Downstream); 1 x USB 1.0 (MediaPlayer); 1 x USB 2.0 (Upstream); 2 x USB 1.0 (Compute Module, 1 x 5V/2A powered)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC); 1 x HDMI (loop through: HDMI, OPS slot-in PC, MediaPlayer)
Output Audio Analogue	1 x 3.5mm jack
Output Control	LAN 100Mbit

Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	3.6 / 58
Compute Module Slot	Slot Technology: Compute Module Slot (NEC proprietary standard)

Sensors

Human Sensor	Optional, external, 4-5m range, triggered actions programmable
--------------	--

Electrical

Power Consumption Eco/max. [W]	95 Eco (shipment setting), 275
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

Mechanical

Dimensions (W x H x D) [mm]	Without stand: 1,075.7 x 605.9 x 99
Weight [kg]	Without stand: 25.4
Bezel Width [mm]	1.8
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6

MediaPlayer

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
Supported Video Formats	MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 0 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz
Supported Audio Formats	MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling

Available Options

Accessories	Calibration kit (KT-LFD-CC2); Feet (ST-322); Overframe kit (KT-49UN-OF); Remote control kit (KT-RC3); Speaker (SP-TF1);
Compute Module Slot	Raspberry Pi Compute Module 1 and 3
OPS Slot	HDBaseT receiver; Intel® Celeron and Core CPUs; OPS-2C Quad 3G SDI ;DVB-T/IPTV Tuner Card

Green Features

Energy Efficiency	Energy efficiency class: B; Human Sensor; LED backlight
-------------------	---

Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM Simulation; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; TileMatrix; USB Media Player; User input priority definition; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet

Safety and Ergonomics	BSMI; CE; EAC; FCC; KC/KCC; PSB; RCM; REACH; RoHS; SASO; TÜV GS; TÜV S; UL/C-UL; VCCI
Audio	Optional Speakers (15 W + 15 W)
Plug and Play	VESA DDC/CI
Shipping Content	Display; DisplayPort Cable; HDMI Cable; Power Cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	24/7



CE



RCM



RoHS



TÜV GS



VCCI

For more information:

 nec.com.au

 contactus@nec.com.au

 131 632

Corporate Headquarters (Japan)
NEC Corporation
www.nec.com

Australia
NEC Australia Pty Ltd
www.nec.com.au

North America (USA)
NEC Corporation of America
www.necam.com

Asia Pacific (AP)
NEC Asia Pacific
www.sg.nec.com

Europe (EMEA)
NEC Enterprise Solutions
www.nec-enterprise.com

v.19.06.11 | UN492VS

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

©2019 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

