


Product Information Sheet

UN492S - Video Wall Large Format Display

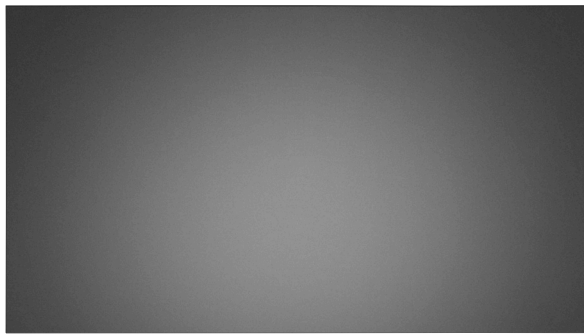

Turn every wall into an opportunity

The slim NEC Multisync® UN492S turns any wall into an opportunity to reliably display information like passenger information, restaurant menus, or corporate agendas. It was made with busy spaces in mind – like airports, train stations, casual dining restaurants and even mission-critical spots like control rooms – and optimised to project static and moving content. Designed with 700cd/m² of brightness and an anti-reflection haze filter, these screens are easy to read, even in bright environments. Installation and operation is a breeze. It comes equipped with powerful calibration capabilities, so the initial video wall setup requires minimal effort, while the long-term colour and brightness will maintain a striking homogeneity. The screen's frameless design forms a flat digital canvas that allows it to blend in and create one continuous image across multiple screens.

Benefits

Easy to install – it's simple to get your display up and running with its out-of-the-box calibrated picture pre-sets, managing colour settings and uniformity controlled by the SpectraView Engine – not to mention its simple, software-free calibration capabilities.

Accelerate your video wall configuration – set up your wall in no time with the display's powerful configuration capabilities, which include Auto ID/IP, Auto Tile Matrix, and Tile-/Frame Compensation. Enjoy flawless playback across your entire video wall.

Long-lasting continuous pictures – align your display with powerful calibration capabilities. Use the white copy function, colour drift correction, uniformity control, self-calibration and validation to create a continuous surface across multiple screens that gives the appearance of one, seamless wall.

Reliable image reproduction – best suited for static image reproduction with reliable accuracy in mission critical applications. Our IPS panel technology makes sure you have the best viewing experience with excellent contrast and black level.

Enhanced imaging performance – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the Spectrview Engine for precise, natural images.

Future Ready with Open Modular Intelligence Expansion – upgrade the power of your display at any time by seamlessly integrating one of NEC’s options for OPS Slot-in PCs, Raspberry Pi compute modules or signal interfaces for content feed and computing.

Safe and secure displays – each display is EMC class-B certified and ideally suited for critical emission environments that require safer standards than other displays do.

Product information

Product Name	MultiSync® UN492S
Product Group	LCD 49" Video Wall Display
Order Code	UN492S

Display

Panel Technology	IPS with Direct LED backlights
Active Screen Area (W x H) [mm]	1,074 x 604
Screen Size [inch/cm]	49 / 123.2
Aspect Ratio	16:9
Pixel Pitch [mm]	0.559
Brightness [cd/m²]	700
Contrast Ratio (typ.)	1100:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	28
Supported Orientation	Landscape; Portrait

Synchronisation Rate

Horizontal Frequency [kHz]	26 - 134
Vertical Frequency [Hz]	23 - 86

Resolution

Native Resolution	1920 x 1080			
Supported on DisplayPort and HDMI	3840 x 2160; 1920 x 1080; 1600 x 1200;	1360 x 768; 1280 x 1024; 1280 x 768;	1080i; 1080p; 1024 x 768;	800 x 600; 720p (50/60 Hz); 640 x 480

Connectivity

Input Video Analogue	1 x VGA; Component (RCA); Composite (RCA)
Input Video Digital	1 x DVI-D (with HDCP); 1 x OPS Slot; 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3.5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x RS232; 2 x LAN 100Mbit; remote control wire (3,5mm jack)
Input Data	1 x microSD (Media Player); 1 x USB 1.0 (Media Player); 1 x USB 2.0 (Downstream); 1 x USB 2.0 (Upstream); 2 x USB 1.0 (Compute Module, 1 x 5V/2A powered)

Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC); 1 x HDMI (loop through: HDMI, OPS slot-in PC, Mediaplayer)
Output Audio Analogue	1 x 3.5 mm jack
Output Control	LAN 100Mbit

Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	3.6 / 58
Compute Module Slot	Slot Technology: Compute Module Slot (NEC proprietary standard)

Sensors

Human Sensor	Optional, external, 4-5m range, triggered actions programmable
--------------	--

Electrical

Power Consumption [W]	120 shipping; 320 (max)
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

Mechanical

Dimensions (W x H x D) [mm]	1,076 x 606 x 99
Weight [kg]	24.3
Bezel Width [mm]	0.9 bottom/right; 0.9 top/left; 1.8mm content-to-content
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6

MediaPlayer

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
Supported Video Formats	MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 60 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz
Supported Audio Formats	MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling

Available Options

Accessories	Calibration kit (LCD-CALKIT); Overframe kit (KT-49UN-OF); Remote control kit (KT-RC2)
Compute Module Slot	Raspberry Pi Compute Module 1 and 3
OPS Slot	HDBaseT receiver; Intel® Celeron and Core CPUs; OPS-2C Quad 3G SDI ;DVB-T/IPTV Tuner Card

Green Features

Energy Efficiency	Annual energy consumption: 250 kWh (based on 4 operating hours per day); Carbon savings meter; Energy efficiency class: D; Human Sensor; LED backlight
-------------------	--

Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM Simulation; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; TileMatrix; USB Media Player; User input priority definition; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; FCC; PSB; RCM; REACH; RoHS; SASO; TÜV GS; TÜV S; UL/C-UL; VCCI
Audio	Optional Speakers (15 W + 15 W)
Plug and Play	VESA DDC/CI
Shipping Content	Display; DisplayPort Cable; HDMI Cable; Power Cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	24/7



CE



RCM



RoHS



TÜV GS



VCCI

For more information:

 nec.com.au

 contactus@nec.com.au

 131 632

Corporate Headquarters (Japan)
NEC Corporation
www.nec.com

Australia
NEC Australia Pty Ltd
www.nec.com.au

North America (USA)
NEC Corporation of America
www.necam.com

Asia Pacific (AP)
NEC Asia Pacific
www.sg.nec.com

Europe (EMEA)
NEC Enterprise Solutions
www.nec-enterprise.com

v.23.05.19 | UN492S

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

©2019 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

