


Product Information Sheet

V554-T - LCD 50" Large Format Infrared Touch Display

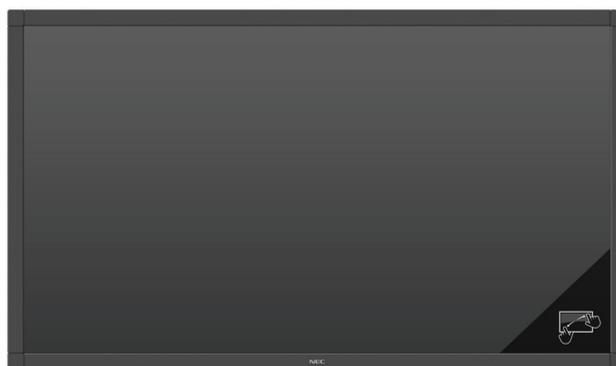

Interactive Digital Signage goes plug and play

The interactive touch NEC V554-T display delivers a satisfying user experience with fast and precise touch performance. Even in high bright conditions the display demonstrates strong light resistance to maintain high reliability and accuracy. It's swift and smooth touch response is ideal for kiosk, wayfinding or self-order applications thanks to an improved touch and writing performance. Supporting both single and multi-user applications, usage is versatile with 10 simultaneous touch points. Crisp and clear images and readability from different viewing angles and distances are guaranteed by combining brightness levels of 440 cd/m² with the anti-reflective and super robust glass surface.

The interactive 55" display is designed for retail, hospitality and transportation use to take orders, assist shoppers and guide travellers. In corporate meeting areas and education the V554-T is ideal for creative huddle spaces, to train students and personnel and provide instruction whilst tracking the growing trend of interactivity in our daily lives.

Benefits

- **Inspiring touch performance boosts user experience** – the fast, stable and robust touch performance supports up to 10 touch points.
- **Resilient and durable design** – the 4mm thermal tempered protective glass with single sided anti-glare coating withstands vandalism and ensures perfect readability with reduced reflection and minimal visibility of finger prints.
- **Simple Plug & Play** – easy set-up without the need to install any drivers on the host PC for all major operating systems.
- **Operational safety even in bright environments** – the strong light resistance provides high reliability and accuracy even under difficult, brightly-lit conditions.
- **Mission-critical 24/7 ready operation** – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.
- **Future Ready with Open Modular Intelligence Expansion** – upgrade the power of your display at any time by seamlessly integrating one of NEC's options for OPS Slot-in PCs, Raspberry Pi compute modules or signal interfaces for content feed and computing.
- **Cost Saving Device Management** – save effort whilst managing all connected NEC devices from a centralised location by using the NaViSet Administrator 2 software tool.

Product Information

Product Name	V554-T (Infrared Touch)
Product Group	LCD 55" Value Large Format Touch Display
Order Code	V554-T

Display

Panel Technology	S-IPS with Edge LED backlights
Active Screen Area (W x H) [mm]	1,209.6 x 680.4
Screen Size [inch/cm]	55 / 138.8
Brightness [cd/m ²]	440
Contrast Ratio (typ.)	1200:1
Viewing Angle [°]	178° Vert., 178° Hor. at CR>10
Colour Depth [bn]	1.073 (10bit)
Response Time (typ.) [ms]	8 (grey-to-grey)
Haze Level [%]	Pro (44)
Supported Orientation	Landscape; Portrait; Face Down

Synchronisation Rate

Horizontal Frequency [kHz]	15.625 / 15.734, 31.5 - 91.1
Vertical Frequency [Hz]	50.0 - 85.0 (Analog Input) / 24.0 - 85.0 (Digital Input)

Resolution

Native Resolution	1920 x 1080
Supported Resolutions on HDMI	4096 x 2160 at 24Hz; 3840 x 2160 at 60/30/25/24Hz; 1920 x 1080 at 60 Hz; 1080p, 1080i, 720p at 60/50Hz; 576p at 50Hz; 576i at 50Hz; 480p at 60Hz; 480i at 60Hz

Connectivity

Input Video Analogue	1 x VGA ; 1 x Composite (RCA)
Input Video Digital	1 x DVI-D (with HDCP); 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3.5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x LAN 100Mbit; 1 x Remote Control (3.5 mm jack); 1 x RS232
Input Data	1 x microSD (MediaPlayer); 1 x USB 2.0 (MediaPlayer); 1 x USB 2.0 (Service); 1 x USB Type-B (Upstream); 2 x USB 2.0 (Compute Module, 1 x 5V/2A powered)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC)
Output Audio Analogue	1 x 3.5 mm jack
Output Control	1 x LAN 100Mbit

Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	10 / 61
Compute Module Slot	Slot Technology: Compute Module Slot (NEC proprietary standard)

Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

V554-T - LCD 55" Large Format Infrared Touch Display

NFC Sensor Integrated, 2cm range, free NEC Android App required

Electrical

Power Consumption [W]	110 (Normal Operation)
Power Savings Mode [W]	< 0.5 (ECO Standby); < 3 (Networked Standby)
Power Management	VESA DPMS

Environmental Conditions

Operating Temperature [°C]	+0 to +35
Operating Humidity [%]	20 to 80

Mechanical

Dimensions (W x H x D) [mm]	1,278.6 x 749.4 x 85.9
Weight [kg]	39
Bezel Width [mm]	33.4 (left and right); 33.4 (top and bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP5X (front); IP2X (back)

Glass

Thickness [mm]	4
Type	Thermal-tempered, anti-glare coating
Light Transmission [%]	88 (+/- 1 %)

Touch

Touch Technology	Infrared Touch
Number of Touches	Real multi-touch up to 10 touches
Response Time [ms]	≤ 15
Touch Method	Finger; Gloves; Stylus (≥ 6 mm)
Supported Operating System	Windows
Data Interface	USB-HID
Touch Resolution	32767 x 32767

Additional Features

Special Characteristics	Ambient Light Sensor; AMX NetLinX Support; ASCII Control Commands; Auto ID assignment; Auto tiling function; Automated Email Alert; CEC Support; Crestron RoomView Support; DICOM support; Display Browser Control; Emergency Notification; Full System Scheduler; Hardware colour calibration possible; Image flip; Intelligent Wireless Data (based on NFC); KeyGuide; MediaPlayer with Browser Control; NaViSet Administrator 2; OmniColor Control; OSD rotation for portrait mode; PLink Support; Point Zoom Function; Powered USB-Port; Programmable 12-bit LUT with 3 memory banks; Removable Logo; Secure Mode Operation; Slim LED Indicator; SNMP Support; TileMatrix (10 x 10); User readable log function; Various picture in picture options
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	C-tick; CE; EAC; EMC Class B; FCC; PSB; RoHS; SASO; TÜV GS; UL/C-UL; UL/C-UL or CSA; VCCI
Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; DVI-D cable; Power Cable; Remote Control; USB cable; User Manual
Warranty	3 years conditional warranty, additional services available; optional 4 + 5 year warranty extension
Operating Hours	24/7

Available Options

Accessories	Wall Mount (LCM1U, RXF2, RXT2, XSM1U, LSM1U, XTM1U, LTM1U, LTTU, TS525TU). Stand (ST-401). Speaker (SP-TF1)
Compute Module Slot	NEC RPI3CM-IF Bundle (Custom NEC Raspberry Pi Compute Module 3, with NEC IF10CE Interface Board)
OPS Slot	HD-SDI inputs (SB-01HC for 1.5G, SB-04HC for 3G, SB-09HC for Quad SDI), HD-Base-T input (SB-07BC), Celeron OPS PC's, Intel Core i5 OPS PC's

MediaPlayer

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
Supported Video Formats	.mpg, .mpeg, .wmv, .mov, .flv, .f4v (H.264: 1080p at 30fps/1080i at 60fps; MP2: MP at ML, MP at HL)
Supported Audio Formats	.wav, .mp3 (Sampling up to 48kHz) (Bit rates: MP2 - Up to 384 kbps, MP3 - Up to 320 Kbps, ACC - Up to 1440 Kbps)
Supported File Storage / File System	MicroSDHC / FAT16, FAT32; USB 2.0 / FAT16, FAT32

Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 175 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: B; Human Sensor
Ecological Materials	Manuals on CD; Optional feet



For more information, visit au.nec.com, email contactus@nec.com.au or call 131 632

Corporate Headquarters (Japan)
NEC Corporation
www.nec.com

Australia
NEC Australia Pty Ltd
au.nec.com

North America (USA)
NEC Corporation of America
www.necam.com

Asia Pacific (AP)
NEC Asia Pacific
sg.nec.com

Europe (EMEA)
NEC Enterprise Solutions
www.nec-enterprise.com

v 23.02.18 | V554-T Value Large Format Touch Display

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

©2018 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

