


## Product Information Sheet

# UN462VA - Video Wall Large Format Display

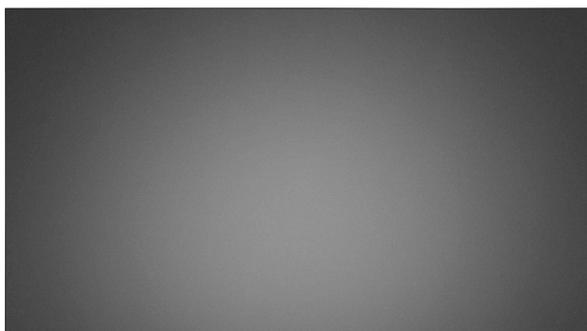

## Turn every wall into an opportunity

The slim NEC Multisync® UN462VA turns any wall into an opportunity to reliably display information like passenger information, restaurant menus, or corporate agendas. And it does so for less the price, while never sacrificing performance. These displays were made with busy spaces in mind – airports, train stations, casual dining restaurants and even mission-critical spots like control rooms – and optimised to project static and moving content. Designed with 500 cd/m<sup>2</sup> of brightness, these screens are easy to read under common light conditions. Installation and operation is a breeze. It comes equipped with powerful calibration capabilities, so the initial video wall setup requires minimal effort, while the long-term colour and brightness will maintain a striking homogeneity. The screen's frameless design forms a flat digital canvas that allows it to blend in and create one continuous image across multiple screens.

### Benefits

**Easy to install** – it's simple to get your display up and running with its out-of-the-box calibrated picture pre-sets, managing colour settings and uniformity controlled by the SpectraView Engine – not to mention its simple, software-free calibration capabilities.

**Accelerate your video wall configuration** – set up your wall in no time with the display's powerful configuration capabilities, which include Auto ID/IP, Auto Tile Matrix, and Tile-/Frame Compensation. Enjoy flawless playback across your entire video wall.

**Long-lasting continuous pictures** – align your display with powerful calibration capabilities. Use the white copy function, colour drift correction, uniformity control, self-calibration and validation to create a continuous surface across multiple screens that gives the appearance of one, seamless wall.

**Reliable image reproduction** – best suited for static image reproduction with reliable accuracy in mission critical applications. Our PVA panel technology makes sure you have the best viewing experience with excellent contrast and black level.

**Enhanced imaging performance** – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the Spectraview Engine for precise, natural images.

**Future Ready with Open Modular Intelligence Expansion** – upgrade the power of your display at any time by seamlessly integrating one of NEC’s options for OPS Slot-in PCs, Raspberry Pi compute modules or signal interfaces for content feed and computing.

**Safe and secure displays** – each display is EMC class-B certified and ideally suited for critical emission environments that require safer standards than other displays do.

**Product information**

Product Name	MultiSync® UN462VA
Product Group	LCD 46" Video Wall Display
Order Code	UN462VA

**Display**

Panel Technology	VA with Direct LED backlights
Active Screen Area (W x H) [mm]	1,018.1 x 572.7
Screen Size [inch/cm]	46 / 117
Aspect Ratio	16:9
Pixel Pitch [mm]	0.530
Brightness [cd/m²]	500
Contrast Ratio (typ.)	3500:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	25
Supported Orientation	Landscape; Portrait

**Synchronisation Rate**

Horizontal Frequency [kHz]	26 - 134
Vertical Frequency [Hz]	23 - 86

**Resolution**

Native Resolution	1920 x 1080			
Supported on DisplayPort and HDMI	3840 x 2160; 1920 x 1080; 1600 x 1200;	1360 x 768; 1280 x 1024; 1280 x 768;	1080i; 1080p; 1024 x 768;	800 x 600; 720p (50/60 Hz); 640 x 480

**Connectivity**

Input Video Analogue	1 x VGA; Composite (RCA)
Input Video Digital	1 x DVI-D (with HDCP); 1 x OPS Slot; 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3.5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x RS232; 2 x LAN 100Mbit; remote control wire (3,5mm jack)
Input Data	1 x microSD (Media Player); 1 x USB 1.0 (Media Player); 1 x USB 2.0 (Downstream); 1 x USB 2.0 (Upstream); 2 x USB 1.0 (Compute Module, 1 x 5V/2A powered)

Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC); 1 x HDMI (loop through: HDMI, OPS slot-in PC, Mediaplayer)
Output Audio Analogue	1 x 3.5 mm jack
Output Control	LAN 100Mbit

**Open Modular Intelligence**

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	3.6 / 58
Compute Module Slot	Slot Technology: Compute Module Slot (NEC proprietary standard)

**Sensors**

Human Sensor	Optional, external, 4-5m range, triggered actions programmable
--------------	--

**Electrical**

Power Consumption [W]	290 (max.); 90 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)

**Environmental Conditions**

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

**Mechanical**

Dimensions (W x H x D) [mm]	1,022 x 577 x 101
Weight [kg]	21.4
Bezel Width [mm]	1.2 bottom/right; 2.3 top/left; 3.5
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6

**MediaPlayer**

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
Supported Video Formats	MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 60 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz
Supported Audio Formats	MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling

**Available Options**

Accessories	Calibration kit (LCD-CALKIT); Overframe kit (KT-46UN-OF5); Remote control kit (KT-RC2)
Compute Module Slot	Raspberry Pi Compute Module 1 and 3
OPS Slot	HDBaseT receiver; Intel® Celeron and Core CPUs; OPS-2C Quad 3G SDI ;DVB-T/IPTV Tuner Card

**Green Features**

Energy Efficiency	Annual energy consumption: 157 kWh (based on 4 operating hours per day); Carbon savings meter; Energy efficiency class: B; Human Sensor; LED backlight
-------------------	--

**Additional Features**

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM Simulation; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; TileMatrix; USB Media Player; User input priority definition; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; FCC; PSB; RCM; REACH; RoHS; SASO; TÜV GS; TÜV S; UL/C-UL; VCCI
Audio	Optional Speakers (15 W + 15 W)
Plug and Play	VESA DDC/CI
Shipping Content	Display; DisplayPort Cable; HDMI Cable; Power Cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	24/7



CE



RCM



RoHS



TÜV GS



VCCI

**For more information:**

[nec.com.au](http://nec.com.au)

[contactus@nec.com.au](mailto:contactus@nec.com.au)

131 632

**Corporate Headquarters (Japan)**  
NEC Corporation  
[www.nec.com](http://www.nec.com)

**Australia**  
NEC Australia Pty Ltd  
[www.nec.com.au](http://www.nec.com.au)

**North America (USA)**  
NEC Corporation of America  
[www.necam.com](http://www.necam.com)

**Asia Pacific (AP)**  
NEC Asia Pacific  
[www.sg.nec.com](http://www.sg.nec.com)

**Europe (EMEA)**  
NEC Enterprise Solutions  
[www.nec-enterprise.com](http://www.nec-enterprise.com)

v.18.02.19 | UN462VA

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

©2019 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

