

PX803UL Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Contents

Product Description, Lens Specs, Screen/Aspect Ratio	
Notes	Pg 1
Distance Charts and Formulas	Pg 2
Ceiling Mount/Desktop Installation	Pg 3
Lens Shift Adjustable Range	Pg 4
Cabinet Dimensions	Pg 5
Cabinet Dimensions	Pg 6
Optional Lens Dimensions	Pg 7
Ventilation Requirements	Pg 8
Regulatory Labels	Pg 9
Input Panel and Button Panel	Pg 10
Control Codes	Pg 11



Product Description

Type:	1 chip DMD Reflection Type 0.65 in. 2x LVDS DMD 0.67 in. 2x LVDS DMD	Dimensions: 19.7"(W) x 8.5"(H) x 23.0"(D)
Resolution:	1920 x 1200 (16:10)	Weight: 61.7 lbs. / 28.9kg
Fan Noise:	40 dB / 35dB @ 1 meter	Brightness: 8000 Lumens
Power Consumption:	874W (max)	BTU's: 2983 BTU/hour

Network Ready, integrated wired and wireless adapter
Manual: Lens Shift, Horizontal & Vertical /Zoom/ Focus

Lens Specifications

NP39ML:	Throw Ratio: ~ 0.38:1 Screen Sizes: 85"-297"	Focal Length: 11.4mm F/#: 1.85	NP19ZL:	Throw Ratio: 2.22 -3.67:1 Screen Sizes: 50-300"	Focal Length: 32.9 – 54.2mm F/#: 1.86 – 2.48
NP16FL:	Throw Ratio: ~ 0.76:1 Screen Sizes: 50"-300"	Focal Length: 11.6mm F/#: 1.85	NP20ZL:	Throw Ratio: 3.60 – 5.40:1 Screen Sizes: 50-300"	Focal Length: 52.8 – 79.1mm F/#: 1.85-2.5
NP17ZL:	Throw Ratio: 1.29 - 1.79:1 Screen Sizes: 50"-300"	Focal Length: 18.7 – 26.5mm F/#: 1.85	NP21ZL:	Throw Ratio: 5.30 – 8.30:1 Screen Sizes: 50-300"	Focal Length: 78.5 -121.9mm F/#: 1.85-2.48
NP18ZL:	Throw Ratio: 1.73 – 2.27:1 Screen Sizes: 50-300"	Focal Length: 25.7 – 33.7mm F/#: 1.64-1.86	NP31ZL:	Throw Ratio: 0.75 – 0.93:1 Screen Sizes: 50-300"	Focal Length: 11.3 -14.1mm F/#: 1.96-2.3

Screen/Aspect Ratio

4:3, 16:9 and 16:10 screens are fully supported with proper aspect ratio control for both type sources using NEC developed scaling technology. Menu selections have settings for each screen type and aspect ratio control for each source type.

Notes

- For screen sizes not indicated on the projection tables, use the formulas below.
If the figures on the tables do not match the results of formulas, use the figures in the table..
- Distances are in inches, for millimeters multiply by 25.4.
- Distances may vary ±5%.

PX803UL Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Formulas: 16:10 Aspect Ratio (WUXGA)

The Projection Formulas use the image width for calculation. Image width is the same for all aspect ratios, only vertical image size varies. For proper projector placement, determine the image width for a desired screen size. Use the Screen Formulas below to calculate all screen dimensions. Plug in the image width for "W" in the Projection Formulas.

Refer to the diagrams and charts for popular screen sizes on page 2 and 3:

Projection Formulas:

NP39ML:	$C = 0.351W - 2.362$		
NP16FL:	$C = 0.794W - 1.85$		
NP17ZL:	$C(\text{Wide}) = 1.281W - 2.094$	$C(\text{Tele}) = 1.825W - 1.913$	
NP18ZL:	$C(\text{Wide}) = 1.764W - 2.677$	$C(\text{Tele}) = 2.313W - 2.638$	
NP19ZL:	$C(\text{Wide}) = 2.261W - 3.150$	$C(\text{Tele}) = 3.747W - 3.114$	
NP20ZL:	$C(\text{Wide}) = 3.654W - 5.319$	$C(\text{Tele}) = 5.492W - 5.299$	
NP21ZL:	$C(\text{Wide}) = 5.469W - 11.626$	$C(\text{Tele}) = 8.527W - 11.531$	
NP31ZL:	$C(\text{Wide}) = 0.775W - 1.839$	$C(\text{Tele}) = 0.970W - 1.740$	

Definitions:

W = Image Width
H = Image Height (size)
C = Throw distance

16:10 Screen Formulas

$W = H \times 16/10$
$H = W \times 10/16$
Screen Diagonal = $W \times 18.868/16$

16:9 Screen Formulas

$W = H \times 16/9$
$H = W \times 9/16$
Screen Diagonal = $W \times 18.358/16$

Distance Chart for popular 16:10 Screens (WUXGA)

Screen Size (16:10)			UST Lens	Rear Lens	Zoom Lenses							
			NP39ML	NP16FL	NP31ZL	NP17ZL	NP18ZL	NP19ZL	NP20ZL	NP21ZL		
Diagonal	Width(W)	Height (H)	0.38:1	0.76:1	0.75-0.93:1	1.29-1.79:1	1.73-2.27:1	2.22-3.67:1	3.60-5.40:1	5.30-8.30:1		
inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches		
40	34	21	11.55	24.83	24.2 - 30.7	40.9 - 59.4	56.6 - 75.1	72.8 - 122.8	117.5 - 179.2	172.1 - 275.0		
60	51	32	18.83	38.80	37.8 - 47.7	63.5 - 91.5	87.6 - 115.8	112.6 - 188.7	181.8 - 275.9	268.4 - 425.1		
68	58	36	21.48	43.88	42.8 - 53.9	71.7 - 103.2	98.9 - 130.6	127.1 - 212.7	205.2 - 311.0	303.4 - 479.6		
72	61	38	22.80	46.43	45.3 - 57.0	75.8 - 109.0	104.6 - 138.0	134.3 - 224.7	216.8 - 328.6	320.9 - 506.9		
85	72	45	27.44	55.32	54.0 - 67.8	90.1 - 129.5	124.3 - 163.9	159.6 - 266.7	257.8 - 390.1	382.1 - 602.4		
108	92	57.5	35.72	71.20	69.5 - 87.1	115.8 - 166.0	159.6 - 210.2	204.9 - 341.6	330.8 - 500.0	491.5 - 773.0		
113	96	60	37.37	74.37	72.6 - 91.0	120.9 - 173.3	166.7 - 219.4	213.9 - 356.6	345.5 - 521.9	513.4 - 807.1		
130	110	69	43.33	85.81	83.7 - 104.9	139.3 - 199.6	192.1 - 252.7	246.5 - 410.6	398.1 - 601.0	592.2 - 929.8		
137	116	72.5	45.65	90.25	88.1 - 110.3	146.5 - 209.8	201.9 - 265.7	259.1 - 431.5	418.5 - 631.8	622.8 - 977.6		
164	139	87	55.26	108.67	106.0 - 132.7	176.2 - 252.1	242.9 - 319.3	311.6 - 518.5	503.3 - 759.2	749.7 - 1175.4		
189	160	100	63.86	125.19	122.2 - 152.8	202.9 - 290.1	279.6 - 367.4	358.6 - 596.4	579.3 - 873.4	863.4 - 1352.8		
208	176	110	70.49	137.89	134.6 - 168.3	223.4 - 319.3	307.8 - 404.5	394.8 - 656.4	637.8 - 961.3	950.9 - 1489.2		
226	192	120	77.11	150.60	147.0 - 183.7	243.9 - 348.5	336.0 - 441.5	431.0 - 716.3	696.2 - 1049.2	1038.4 - 1625.7		
270	229	143	92.34	179.82	175.5 - 219.3	291.0 - 415.6	400.9 - 526.6	514.2 - 854.2	830.7 - 1251.3	1239.7 - 1939.4		
300	254	159	102.94	NA	195.0 - 243.6	376.0 - 752.4	747.3 - 1198.4	1181.3 - 1826.5	1377.5 - 2154.3	1377.5 - 2154.3		
500	424	265	NA	NA	326.8 - 407.8	628.9 - 1257.3	1250.6 - 2003.6	1977.1 - 3054.1	2307.2 - 3603.9	2307.2 - 3603.9		

Distance Chart using 16:9 native projector with 16:9 Image (1080p)


Screen Size (16:9)			UST Lens	Rear Lens	Zoom Lenses							
			NP39ML	NP16FL	NP31ZL	NP17ZL	NP18ZL	NP19ZL	NP20ZL	NP21ZL		
Diagonal	Width(W)	Height (H)	0.38:1	0.76:1	0.75-0.93:1	1.29-1.79:1	1.73-2.27:1	2.22-3.67:1	3.60-5.40:1	5.30-8.30:1		
inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches		
39	34	19	10	25.15	24.5 - 31.2	41.5 - 60.1	57.3 - 76.0	73.7 - 124.3	118.9 - 181.4	174.3 - 278.4		
59	51	29	16	38.64	37.7 - 47.7	63.2 - 91.2	87.3 - 115.3	112.2 - 188.0	181.0 - 274.8	267.3 - 423.3		
67	58	33	18	44.20	43.1 - 54.5	72.2 - 103.9	99.6 - 131.5	128.0 - 214.2	206.6 - 313.2	305.6 - 483.0		
70	61	34	19	46.58	45.4 - 57.4	76.0 - 109.4	104.9 - 138.5	134.8 - 225.5	217.6 - 329.7	322.0 - 508.6		
83	72	41	23	55.32	54.0 - 68.1	90.1 - 129.5	124.3 - 163.9	159.6 - 266.7	257.8 - 390.1	382.1 - 602.4		
106	92	52	30	71.20	69.5 - 87.5	115.8 - 166.0	159.6 - 210.2	204.9 - 341.6	330.8 - 500.0	491.5 - 773.0		
110	96	54	31	74.37	72.6 - 91.4	120.9 - 173.3	166.7 - 219.4	213.9 - 356.6	345.5 - 521.9	513.4 - 807.1		
126	110	62	36	85.49	83.4 - 105.0	138.8 - 198.8	191.4 - 251.8	245.6 - 409.1	396.6 - 598.8	590.0 - 926.4		
133	116	65	38	90.25	88.1 - 110.8	146.5 - 209.8	201.9 - 265.7	259.1 - 431.5	418.5 - 631.8	622.8 - 977.6		
159	139	78	46	108.52	105.9 - 133.1	176.0 - 251.8	242.5 - 318.9	311.1 - 517.7	502.6 - 758.1	748.6 - 1173.7		
184	160	90	54	125.19	122.2 - 153.5	202.9 - 290.1	279.6 - 367.4	358.6 - 596.4	579.3 - 873.4	863.4 - 1352.8		
202	176	99	59	137.89	134.6 - 169.0	223.4 - 319.3	307.8 - 404.5	394.8 - 656.4	637.8 - 961.3	950.9 - 1489.2		
220	192	108	65	150.60	147.0 - 184.5	243.9 - 348.5	336.0 - 441.5	431.0 - 716.3	696.2 - 1049.2	1038.4 - 1625.7		
263	229	129	78	179.98	175.6 - 220.4	291.3 - 416.0	401.3 - 527.0	514.6 - 854.9	831.4 - 1252.4	1240.8 - 1941.2		
400	339	212	NA	NA	260.9 - 327.1	502.5 - 1004.9	998.9 - 1601.0	1579.2 - 2440.3	1628.9 - 2879.1	1842.4 - 2879.1		
500	424	265	NA	NA	326.8 - 409.5	628.9 - 1257.3	1250.6 - 2003.6	1977.1 - 3054.1	2039.2 - 3603.9	2307.2 - 3603.9		

PX803UL Installation Guide


Desktop and Ceiling Mount

Rev 1.0


Ceiling Mount Installation

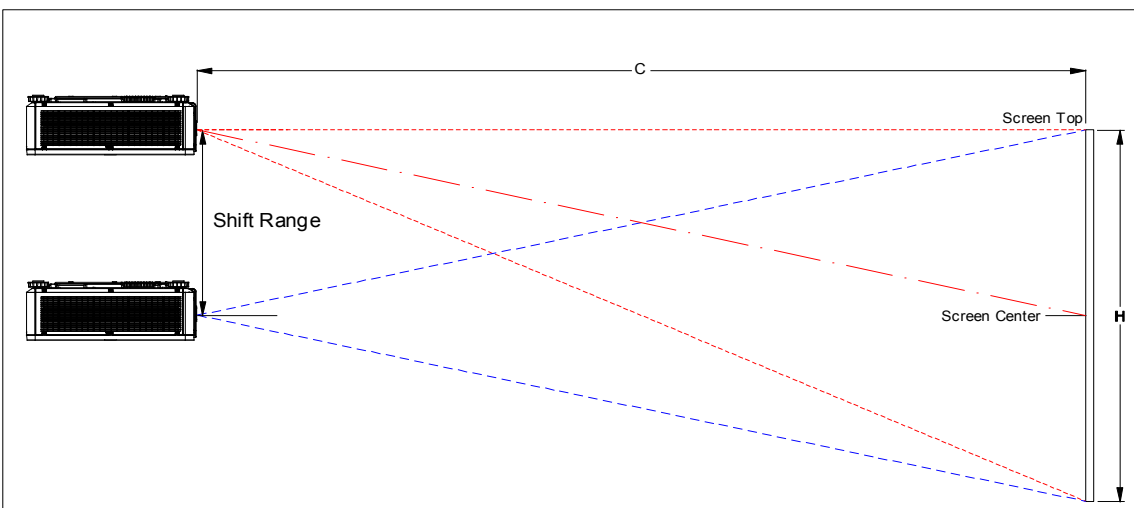

Desktop Installation

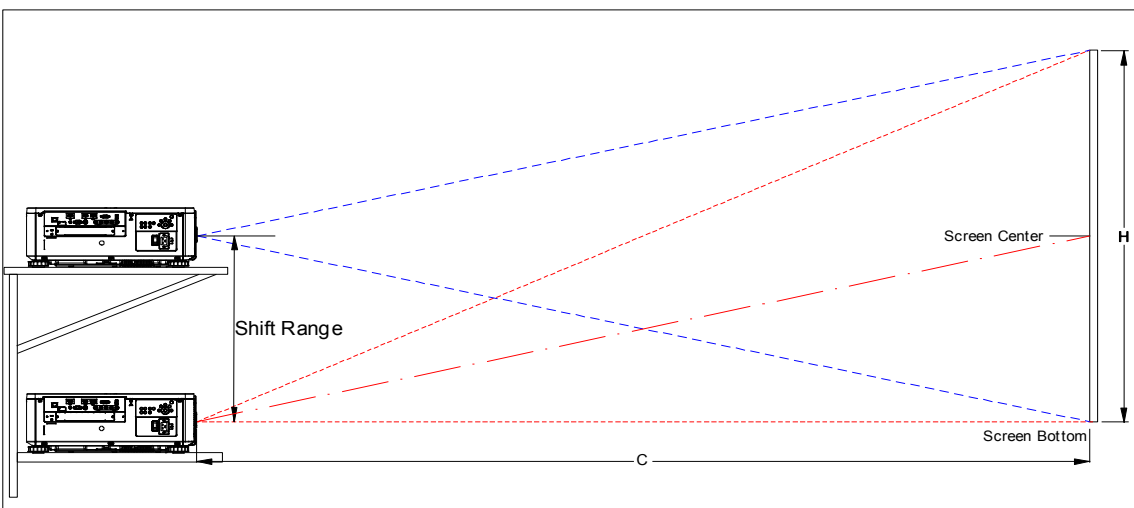

Note: Lens Shift Feature is not available for the NP16FL. This lens should only be used for "zero degree"/"no-offset" applications. See below

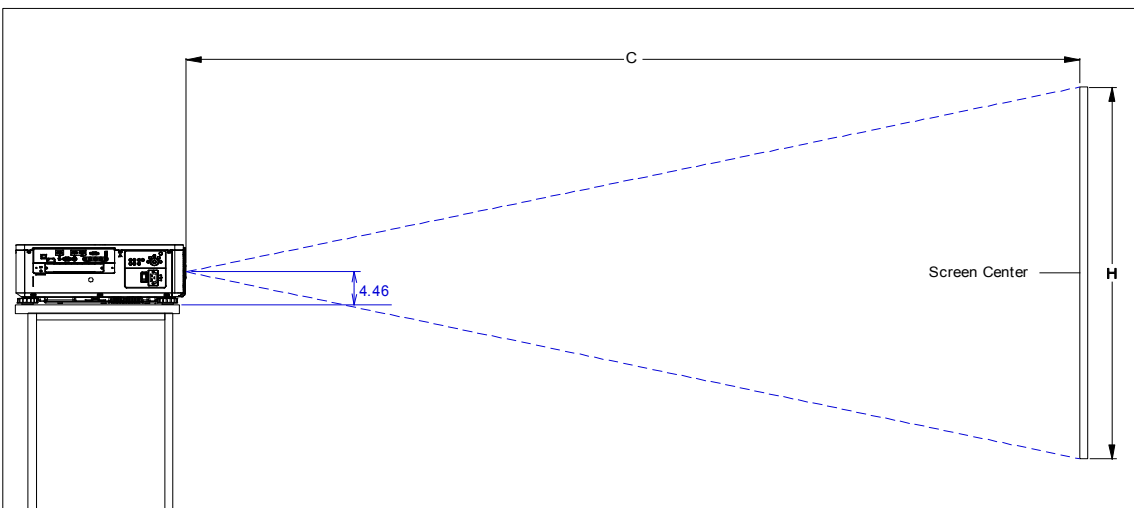


PX803UL Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Lens Shift Adjustable Range

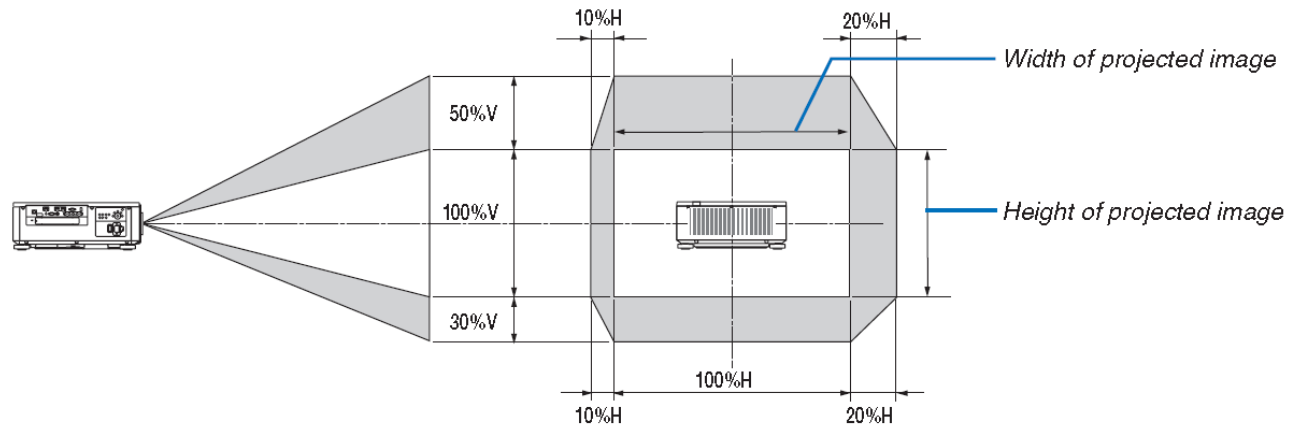

Lens Shift Range for Desktop and Ceiling Mount Application

The diagram below shows the location of the image position in the lens. The lens can be shifted within the shaded area as shown using the normal projection position as a starting point.

Note: Lens shift feature is not available with NP16FL (rear lens). NP16FL should be used only for "zero degree" / no-offset" applications.

Note: Projector is set out of the box at maximum lens shift, which is how it is depicted above.
(W: width of projected image, H: height of projected image)

PX803UL Installation Guide

Desktop and Ceiling Mount


Rev 1.0

Cabinet Dimensions

The following diagrams show the cabinet dimensions for the PX803UL.

Dimensions are in inches. For millimeters multiply by 25.4.

Note: Dimensions below shown with the NP18ZL lens

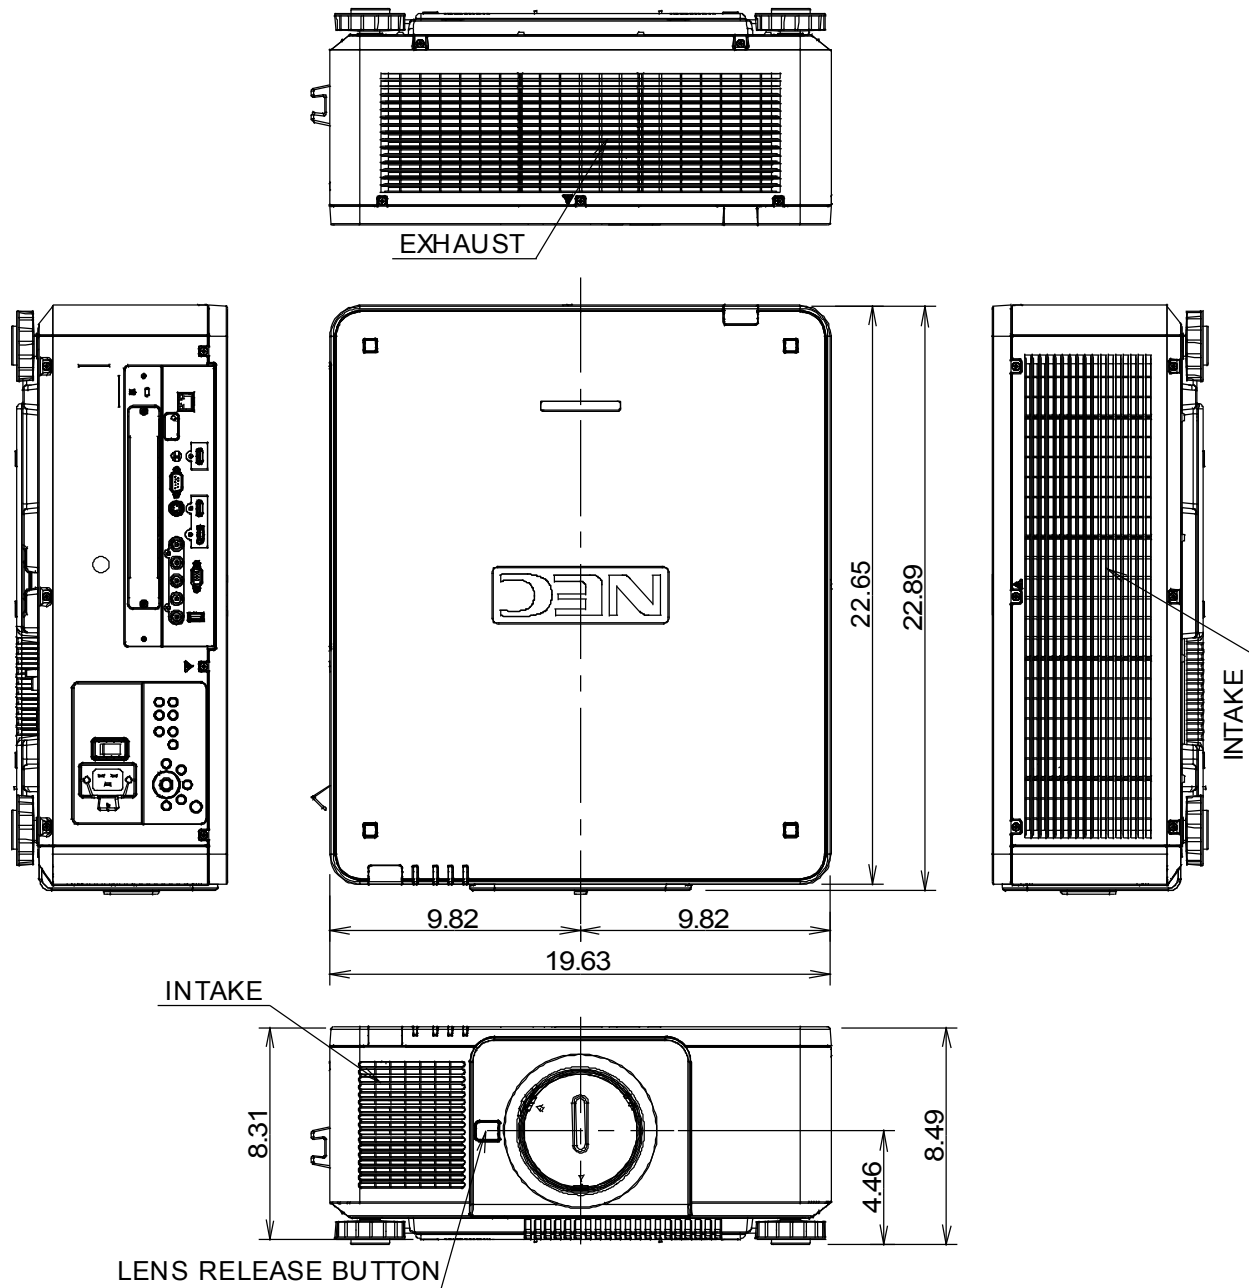


PX803UL Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Cabinet Dimensions

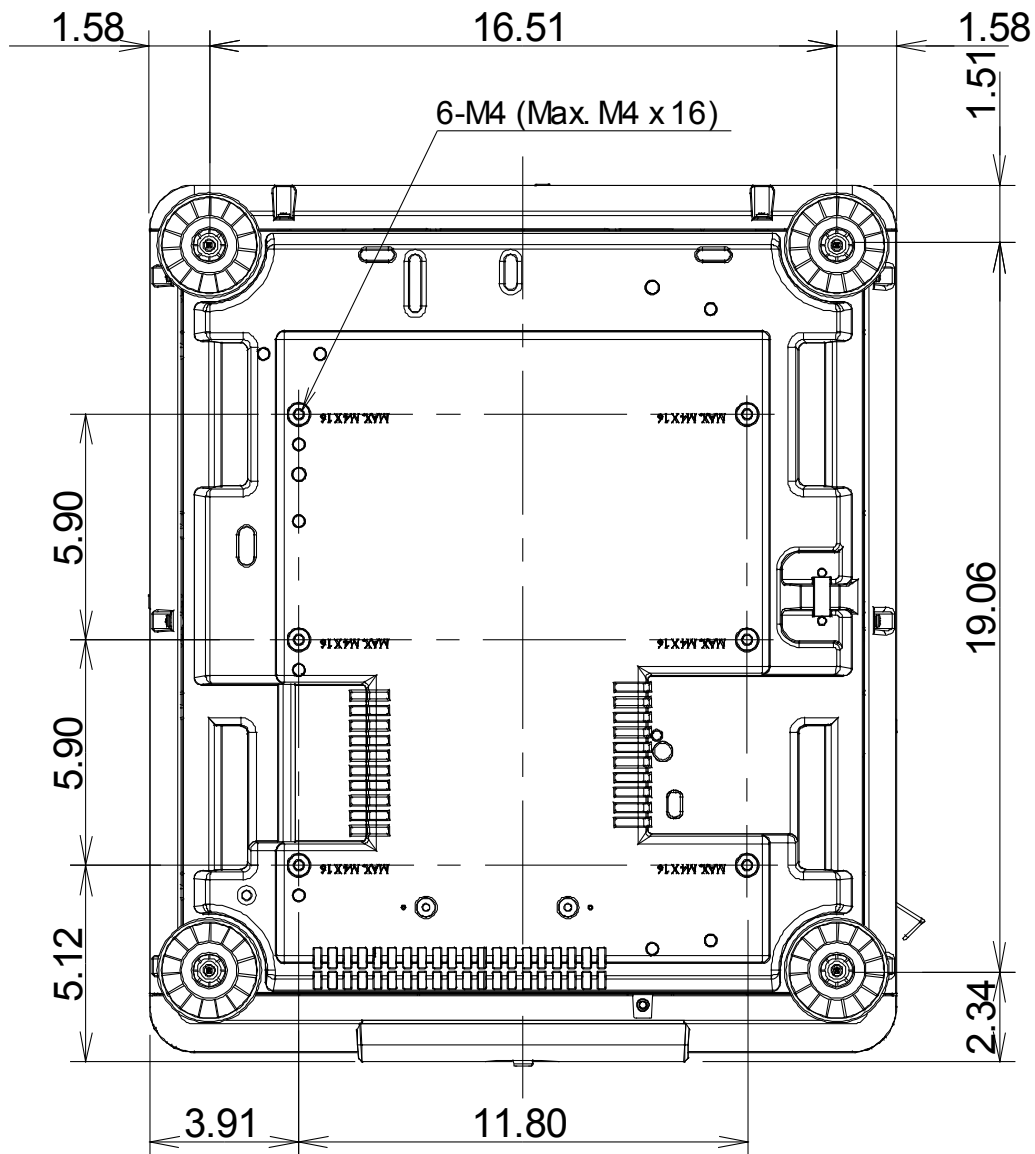


PX803UL Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Optional Lens Dimensions

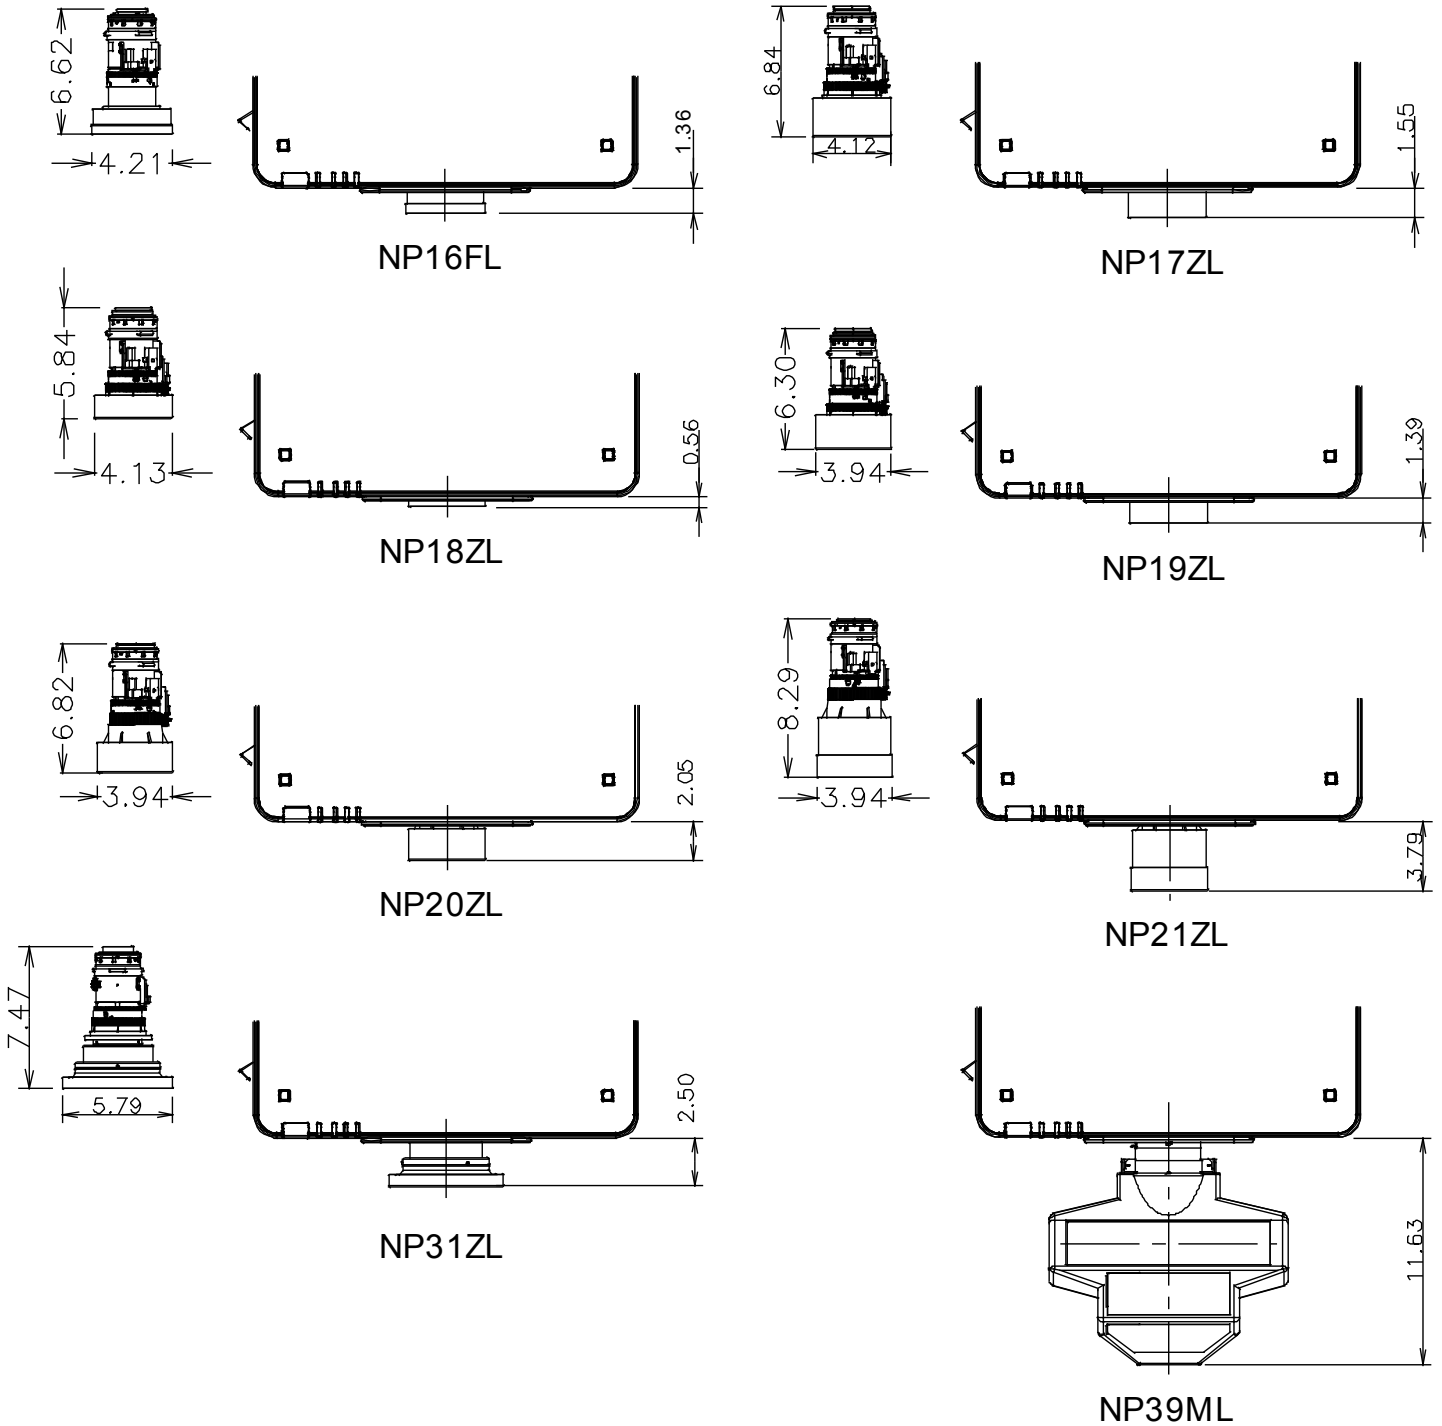


PX803UL Installation Guide

Desktop and Ceiling Mount


Rev 1.0

Ventilation Requirements

- If there are walls on both sides of the projector :

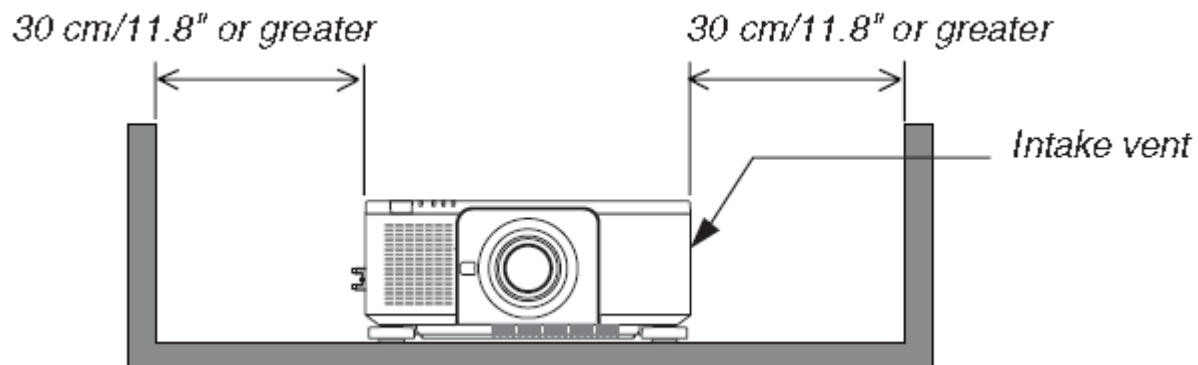

- If there's a wall behind the projector :

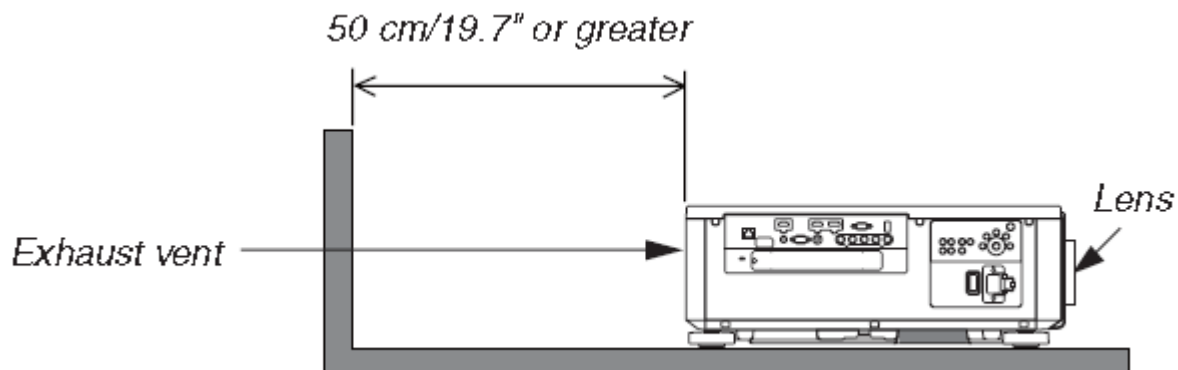

PX803UL Installation Guide

Desktop and Ceiling Mount

Rev 1.0

Regulatory Labels

	CAUTION POSSIBLY HAZARDOUS OPTICAL RADIATION EMITTED FROM THIS PRODUCT. DO NOT STARE AT OPERATING LAMP. MAY BE HARMFUL TO THE EYES. RISK GROUP 2 IEC 62471:2006	VORSICHT Dieses Produkt strahlt eventuelle gefährliche optische Strahlung aus. Schauen Sie nicht in die eingeschaltete Lampe. Dies kann Ihre Augen gefährden. RISIKOGRUPPE 2 IEC 62471:2006	MISE EN GARDE Rayonnement optique éventuellement dangereux émis par ce produit. Ne regardez pas fixement la lampe de fonctionnement. Cela peut être dangereux pour les yeux. GROUPE À RISQUE 2 IEC 62471:2006
--	---	--	--

	COMPLIES WITH 21 CFR 1040.10 AND 1040.11 EXCEPT FOR DEVIATIONS PURSUANT TO LASER NOTICE No. 50, DATED JUNE 24, 2007
LASER RADIATION AVOID DIRECT EYE EXPOSURE CLASS 3R LASER PRODUCT WAVE LENGTH: 450-460 nm MAX. PULSE ENERGY: 0.376mJ PULSE DURATION: 0.74 ms IEC/EN 60825-1:2007 CLASS 1 LASER PRODUCT IEC/EN 60825-1:2014	레이저 방사선 육안으로 쳐다보지 말 것 등급 3R 레이저 제품 파장: 450-460nm 최대 펄스 에너지: 0.376mJ 펄스 지속 시간: 0.74ms IEC/EN 60825-1:2007 등급 1 레이저 제품 IEC/EN 60825-1:2014
LASERSTRAHLUNG DIREKTE EXPOSITION DER AUGEN VERMEIDEN LASERPRODUKT DER KLASSE 3R WELLENLÄNGE: 450-460 nm MAX. PULSENERGIE: 0,376 mJ IMPULSDAUER: 0,74 ms IEC/EN 60825-1:2007 LASERPRODUKT DER KLASSE 1 IEC/EN 60825-1:2014	
RAYONNEMENT LASER ÉVITER D'EXPOSER DIRECTEMENT LES YEUX PRODUIT LASER DE CLASSE 3R LONGUEUR D'ONDE : 450-460 nm ÉNERGIE D'IMPULSION MAX. : 0,376 mJ DURÉE DE L'IMPULSION : 0,74 ms IEC/EN 60825-1:2007 PRODUIT LASER DE CLASSE 1 IEC/EN 60825-1:2014	
ЛАЗЕРНОЕ ИЗЛУЧЕНИЕ ИЗБЕГАЙТЕ ПРЯМОГО ВОЗДЕЙСТВИЯ НА ГЛАЗА ЛАЗЕРНОЕ ИЗДЕЛИЕ 3R КЛАССА ОПАСНОСТИ ДЛИНА ВОЛНЫ: 450-460 нм МАКС. ЭНЕРГИЯ ИМПУЛЬСА: 0,376 мДж ДЛИТЕЛЬНОСТЬ ИМПУЛЬСА: 0,74 мс IEC/EN 60825-1:2007 ЛАЗЕРНОЕ ИЗДЕЛИЕ 1 КЛАССА ОПАСНОСТИ IEC/EN 60825-1:2014	

LASER APERTURE LASERÖFFNUNG OUVERTURE LASER АПЕРТУРА ЛАЗЕРА 레이저 개구부

PX803UL Installation Guide


Desktop and Ceiling Mount

Rev 1.0

Input Panel



Control Panel

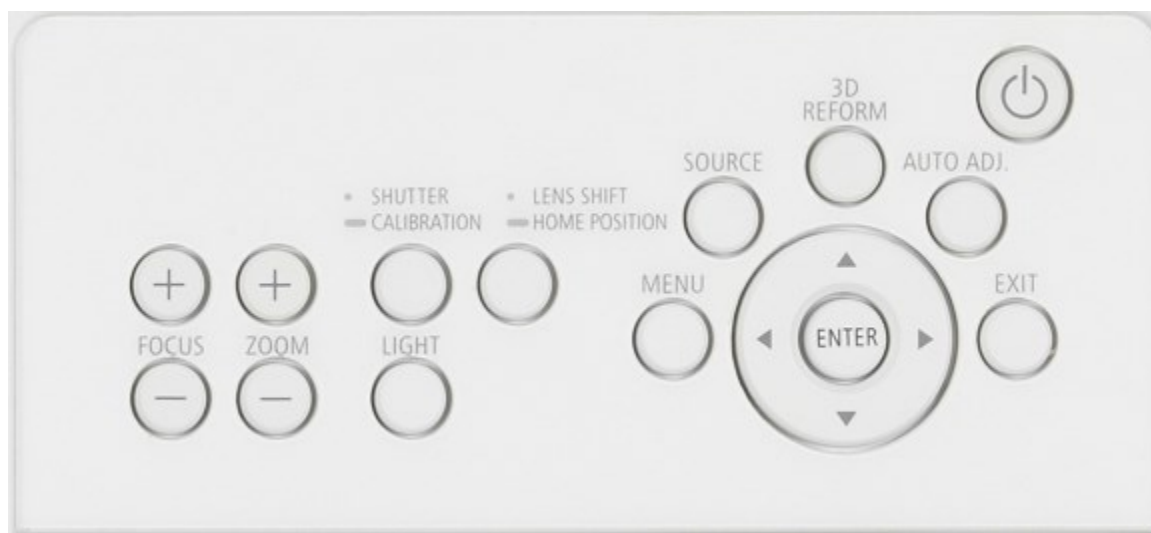

PX803UL Installation Guide

Desktop and Ceiling Mount

Rev 1.0

PC Control Codes


Function	Code Data							
POWER ON	02H	00H	00H	00H	00H	02H		
POWER OFF	02H	01H	00H	00H	00H	03H		
INPUT SELECT COMPUTER	02H	03H	00H	00H	02H	01H	01H	09H
INPUT SELECT BNC	02H	03H	00H	00H	02H	01H	02H	0AH
INPUT SELECT BNC(CV)	02H	03H	00H	00H	02H	01H	06H	0EH
INPUT SELECT BNC(Y/V)	02H	03H	00H	00H	02H	01H	0BH	13H
INPUT SELECT HDMI	02H	03H	00H	00H	02H	01H	A1H	A9H
INPUT SELECT DisplayPort	02H	03H	00H	00H	02H	01H	A6H	AEH
INPUT SELECT HDBaseT	02H	03H	00H	00H	02H	01H	20H	28H
INPUT SELECT SLOT	02H	03H	00H	00H	02H	01H	ABH	B3H
PICTURE MUTE ON	02H	10H	00H	00H	00H	12H		
PICTURE MUTE OFF	02H	11H	00H	00H	00H	13H		

Cable Connection

Communication Protocol:

Baud Rate: 38400 bps (for cable lengths longer than 20', it is recommended changing to 9600 bps in setup menu)
 Data Length: 8 bits
 Parity: No Parity
 Stop Bit: One bit
 X on/off: None
 Communications: Full duplex

PC Control Connector (D-Sub 9P)

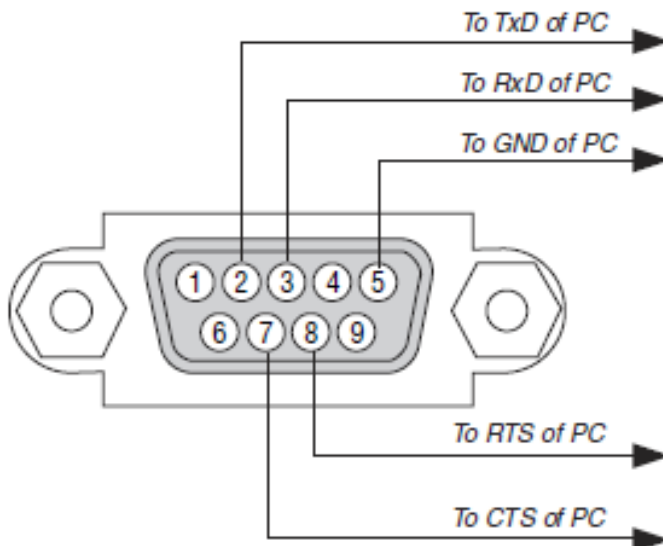

Note 1 : Pins 1, 4, 6, and 9 are used inside the projector.

Note 2 : For long cable runs it is recommended to set communication speed within the projector to 9600 bps.

Note 3 : Jumper "Request to Send" and "Clear to Send" together on both ends of the cable to simplify cable connection.