


## Product Information Sheet

# P484 - LCD 48" Professional Large Format Display

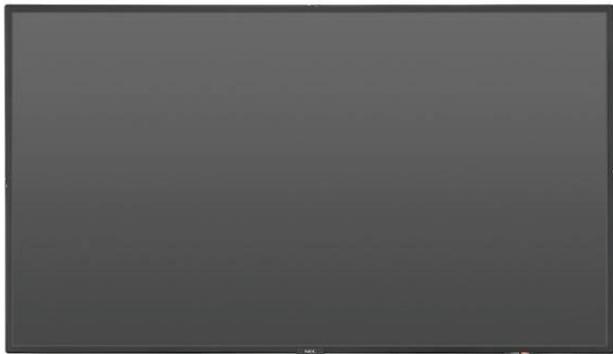

## The Definition of Digital Signage

Modular and scalable, NEC's P484 display brings powerful capability for Digital Signage. Deliver your message with impact and seamless simplicity for the most convincing results.

Compelling readability even in bright ambient light conditions is guaranteed with high brightness levels of 700 cd/m<sup>2</sup> combined with an anti-glare surface. Its modern, slim design forms an elegant digital surface which perfectly complements the surrounding architecture and integrates seamlessly into any environment. The wide range of connectivity options and compatibility with high resolution signals up to 4K/60Hz secure a futureproof investment. The Open Modular Intelligence (OMI) approach provides tailor-made Signage Solutions, where scalable computing power such as Raspberry Pi compute modules or OPS Slot-in PCs are seamlessly embedded into the display.

The 48" P484 is the perfect choice for short and medium viewing distances in retail environments, passenger information, quick service restaurants and all other public spaces.

### Benefits

- **Superb readability in bright light environments** – crisp playback of content thanks to high brightness output of 700 cd/m<sup>2</sup> and anti-reflective screen surface delivers clearly visible messages even under varying and demanding ambient conditions.
- **Enhanced imaging performance** – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the Spectraview Engine for precise, natural images.
- **Modern and slim design** – robust yet elegant allowing for an unobtrusive integration into any application and environment.
- **Future Ready with Open Modular Intelligence Expansion** – upgrade the power of your display at any time by seamlessly integrating one of NEC's options for OPS Slot-in PCs, Raspberry Pi compute modules or signal interfaces for content feed and computing.
- **Mission-critical 24/7 ready operation** – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.
- **Ease of use and operation** – Smart installation, operation and maintenance functionality ensures accurate performance over the entire lifetime of the display saving time, effort and resources.

- **All-in-one Signage solution integrated** – the integrated mediaplayer for simple signage use supports easy content playback and management.
- **Free Download of Multi-Display Management Software** – with NaViSet Administrator 2 you can manage all your connected display devices from a centralised location.

## Product Information

Product Name	P484
Product Group	NEC LCD 48" Professional Large Format Display
Order Code	P484

## Display

Panel Technology	S-PVA with edge LED backlights
Active Screen Area (W x H) [mm]	1,054.1 x 592.9
Screen Size [inch/cm]	48 / 120.9
Brightness [cd/m <sup>2</sup> ]	700, 500 Eco (shipment setting)
Contrast Ratio (typ.)	4000:1
Viewing Angle [°]	178 / 178 (at contrast ratio > 10:1)
Colour Depth [bn]	1.073 (10bit)
Response Time (typ.) [ms]	8 (grey-to-grey)
Haze Level [%]	Pro (25)
Supported Orientation	Landscape, Portrait, Face Up, Face Down

## Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 91.1 (analog and digital)
Vertical Frequency [Hz]	24 - 85

## Resolution

Native Resolution	1920 x 1080
Supported Resolutions	4096 x 2160; 3840 x 2160; 1920 x 2160; 1920 x 1200; 1920 x 1080; 1680 x 1050; 1600 x 1200; 1440 x 900; 1400 x 1050; 1366 x 768; 1360 x 768; 1280 x 1024; 1280 x 960; 1280 x 800; 1280 x 720; 1024 x 768; 800 x 600; 640 x 480

## Connectivity

Input Video Analogue	1 x VGA
Input Video Digital	1 x DVI-D (with HDCP); 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	2 x DisplayPort; 2 x HDMI
Input Control	1 x LAN 100Mbit; 1 x Remote Control (3.5 mm jack); 1 x RS232
Input Data	1 x microSD (MediaPlayer); 1 x USB 2.0 (MediaPlayer); 1 x USB 2.0 (Service); 1 x USB Type-B (Upstream); 2 x USB 2.0 (Compute Module, 1 x 5V/2A powered)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC)
Output Audio Analogue	1 x 3,5 mm jack
Output Control	1 x LAN 100Mbit

## Open Modular Intelligence

OPS Slot	Slot Technology: Open pluggable specification (NEC / Intel OPS standard)
OPS Max. Current / Power Consumption [A / W]	10 / 61
Compute Module Slot	Slot Technology: Compute Module Slot (NEC proprietary standard)

## Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required

## Electrical

Power Consumption [W]	115 Eco (shipment setting), 140
Power Savings Mode [W]	3 (Networked Standby); < 0.5 (ECO Standby)
Power Management	VESA DPMS

## Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80

## Mechanical

Dimensions (W x H x D) [mm]	1,086.5 x 625.3 x 54.7
Weight [kg]	17.6
Bezel Width [mm]	13.2 (left and right); 13.2 (top and bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP5X (front); IP2X (back)

## Additional Features

Special Characteristics	Ambient Light Sensor; AMX NetLinx Support; ASCII Control Commands; Auto ID assignment; Auto tiling function; Automated Email Alert; CEC Support; Crestron RoomView Support; DICOM support; Display Browser Control; Emergency Notification; Full System Scheduler; Hardware colour calibration possible; Image flip; Intelligent Wireless Data (based on NFC); KeyGuide; MediaPlayer with Browser Control; NaViSet Administrator 2; OmniColor Control; OSD rotation for portrait mode; PJLink Support; Point Zoom Function; Powered USB-Port; Programmable 12-bit LUT with 3 memory banks; Removable Logo; Secure Mode Operation; Slim LED Indicator; SNMP Support; TileMatrix (10 x 10); User readable log function; Various picture in picture options
Colour Versions	Black Front Bezel, Black Back Cabinet;
Safety and Ergonomics	C-tick; CE; EMC Class B; FCC; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI
Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; DVI-D cable; Power Cable; Remote Control
Warranty	3 years Conditional Warranty
Operating Hours	24/7

## Available Options

Accessories	Wall Mount (LSM1U, LTM1U, LTMPU, RMF2 & RMT2). Stand ST-401
Compute Module Slot	NEC Compute Module; Raspberry Pi Compute Module 1 and 3
OPS Slot	Single STv2 OPS Slot, (RPI) Compute Module Interface Slot ;

## MediaPlayer

Supported Image Formats	JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000
Supported Video Formats	MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 60 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz
Supported Audio Formats	MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling
Supported File Storage / File System	MicroSDHC / FAT16, FAT32; USB 2.0 / FAT16, FAT32

## Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 168 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: B; Human Sensor
Ecological Materials	Manuals on CD; Optional feet
Ecological Standards	EnergyStar (TBD).(TBD)

For more information, visit [au.nec.com](http://au.nec.com), email [contactus@nec.com.au](mailto:contactus@nec.com.au) or call 131 632

### Corporate Headquarters (Japan)

NEC Corporation  
www.nec.com

### Australia

NEC Australia Pty Ltd  
au.nec.com

### North America (USA)

NEC Corporation of America  
www.necam.com

### Asia Pacific (AP)

NEC Asia Pacific  
sg.nec.com

### Europe (EMEA)

NEC Enterprise Solutions  
www.nec-enterprise.com

v.24.03.17 | P484 Professional Large Format Display

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

© 2017 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

