


Product Information Sheet

M551 - Message Large Format Display

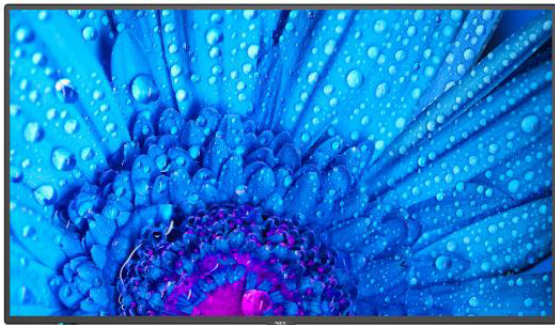

Intuitive professional content delivery

Great first impressions can make all the difference; presenting your business in the best possible way will boost your brand. With slim, modern styling, 24/7 operation and high haze panel to reduce reflections when ambient light is high, the M series is the professional way to deliver your message, yet at an attractive price point.

With the optional NEC MediaPlayer or the more powerful Intel® Smart Display Module (Intel® SDM) computing device, you are primed and ready for intuitive signage creation delivering real-time media playback for exceptional visual experiences. For advertising, infotainment and meeting room applications, the M Series provides powerful, upgradable functionality and all the aesthetic appeal to effortlessly reflect your brand credentials.

Benefits

Modern and slim design – robust yet elegant allowing for an unobtrusive integration into any application and environment.

Secure remote management – control your devices remotely and securely using NEC NaviSet Administrator 2; proactively manage maintenance requirements saving time and resources

Unhindered readability – no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation

Mission-critical 24/7 ready operation – the meticulous selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.

Future Ready Connectivity – featuring multiple industry standard digital and analogue signal inputs for flexible integration into AV infrastructures.

Product Information

Product Name	MultiSync® M551
Product Group	LCD 55" Message Large Format Display
Order Code	M551

Display

Panel Technology	IPS with Edge LED backlights
Screen Size [inch/cm]	55 / 138.8
Aspect Ratio	16:9
Brightness [cd/m²]	500
Contrast Ratio	≥ 8000:1 ¹
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (28)
Supported Orientation	Landscape; Portrait

Synchronisation Rate

Horizontal Frequency [kHz]	26 - 91.1
Vertical Frequency [Hz]	23 - 86

Resolution

Native Resolution	3840 x 2160			
Supported Resolutions	4096 x 2160; 3840 x 2160; 1920 x 2160; 1920 x 1080;	1900 x 1200; 1650 x 1050; 1600 x 1200; 1440 x 900;	1400 x 1050; 1366 x 768; 1360 x 768; 1280 x 1024;	1280 x 720; 1024 x 768

Connectivity

Input Video Digital	1 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Digital	1 x DisplayPort; 2 x HDMI
Input Control	LAN 100Mbit; remote control wire (3.5mm jack); RS232
Output Audio Analogue	1 x 3.5mm jack
Input Detect	Custom; First; Last

Open Modular Intelligence

Intel® SDM	accepts Intel® Smart Display Modules Large and Small up to 66 W
Compute Module Slot	RPi4 Compute Module

Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

Electrical

Power Consumption Eco/max. [W]	80 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)

Power Management	VESA DPMS
Power Supply	100-240 V AC; 50/60 Hz; internal

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

Mechanical

Dimensions (W x H x D) [mm]	1,239.6 x 713 x 61.1
Weight [kg]	26.4
Bezel Width [mm]	12 (top); 12.5 (left and right); 15.6 (bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP5x (front); IP2x (back)
Packaging Dimensions (W x H x D) [mm]	Box 1: 1,430 x 920 x 250
Packaging Weight [kg]	Box 1: 36.47
Colour Bezel	Pantone 426M (black)

Available Options

Accessories	Feet (ST-401/ST-43M);
-------------	-----------------------

Green Features

Energy Efficiency	Annual energy consumption: 131 kWh (based on 4 operating hours per day); Energy efficiency class: G; LED backlight
Ecological Standards	EnergyStar 8.0


Additional Features

Safety and Ergonomics	Energy Star 8.0 ; RCM
Pixel Failure Class	ISO 9241-307, Class 1
Audio	Integrated Speakers (10 W + 10 W)
Shipping Content	Display; HDMI Cable; Power Cable; Remote Control; User Manual
Operating Hours	24/7
External Control	AMX NetLinx Support; ASCII Control Commands; HDMI CEC; HTTP Browser; PLink; Scheduled Timer; SNMP
Remote Management	Automated Email Alerts; NEC NaViSet Administrator 2
Security	Disable HW Buttons; Disable IR Functionality; Emergency Notification

¹ out of the box conditions, local dimming ON

For more information:

 nec.com.au

 contactus@nec.com.au

 131 632

Corporate Headquarters (Japan)
NEC Corporation
www.nec.com

Australia
NEC Australia Pty Ltd
www.nec.com.au

North America (USA)
NEC Corporation of America
www.necam.com

Asia Pacific (AP)
NEC Asia Pacific
www.sg.nec.com

Europe (EMEA)
NEC Enterprise Solutions
www.nec-enterprise.com

v.21.02.02 | M551

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

©2021 NEC Australia Pty Ltd. All rights reserved. NEC and NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

NEC